

COMBINED
PROTECTION AGAINST
BURGLARY AND FIRE
AT HOME



HOMESAFE S2 30P





BURGLARY & FIRE-RESISTANT SAFE


KEY FEATURES

- Combined fire and burglary protection in one safe.
- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes' fire protection for documents.
- Choice of 6 models: from 11- to 91-litre capacity.
- Choice of locking options in all models: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock.
- Dual base fixing holes, supplied with two concrete anchor bolts.
- Ideal safe for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The safe door is secured using the new revolutionary "V" bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.
- The safe is prepared & anchoring kit is supplied to allow the HomeSafe S2 30P range to be securely base- or rear-fixed to resist unauthorised removal once installed.



HOMESAFE S2 30P

PRODUCT SPECIFICATIONS

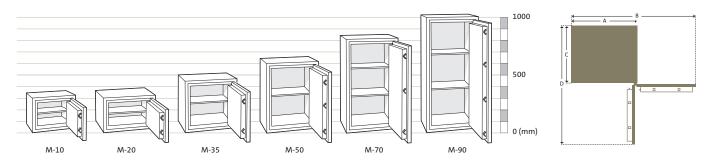

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Width With Door Open 180° (B)	Depth With Door Open 90° (D)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-10	300	360	300	662	627	210	270	191	11	24	1
M-20	300	445	390	832	803	210	355	281	21	32	1
M-35	450	445	390	832	803	360	355	281	36	42	1
M-50	600	445	390	832	803	510	355	281	51	53	1
M-70	800	445	390	832	803	710	355	281	71	65	2
M-90	1000	445	390	832	803	910	355	281	91	78	2

^{*} Hinges project 20mm beyond the depth (C) given above. In standard electronic models, the overall projection increases to 30mm.

LOCK OPTIONS



either a key lock (Class A) or a high-security electronic lock (Class B). All locks are independently tested and are certified in accordance with the EN 1300 standard. The high-security electronic lock includes the following features, easily programmed by the owner:



• 1 master code and 1 user codes.

Authorised dealer

- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.

CERTIFICATION

LFS 30P FIRE PROTECTION

The whole range has been certified by ECB•S in accordance with European Standard EN 15659 to provide 30-minute protection for documents in the event of a fire.

LEVEL S2 BURGLARY PROTECTION

All sizes have been certified by ECB•S in accordance with European Standard EN 14450 to burglary resistance Level S2.

CONSTRUCTION

Both the walls and the door are constructed using an inner and outer layer of steel containing a specially formulated burglary and fire resistant material developed by Chubbsafes. This material provides class-leading performance with low weights enabling installation almost anywhere!

COLOURS

HomeSafe S2 30P comes standard in anthracite grey (RAL 7016) and is also available in light grey (RAL 7035) as a secondary option

www.chubbsafes.com

