




**CONVENIENT DEPOSIT**  
FOR VARIOUS  
OPERATIONS ON  
**BUSINESS PREMISES**

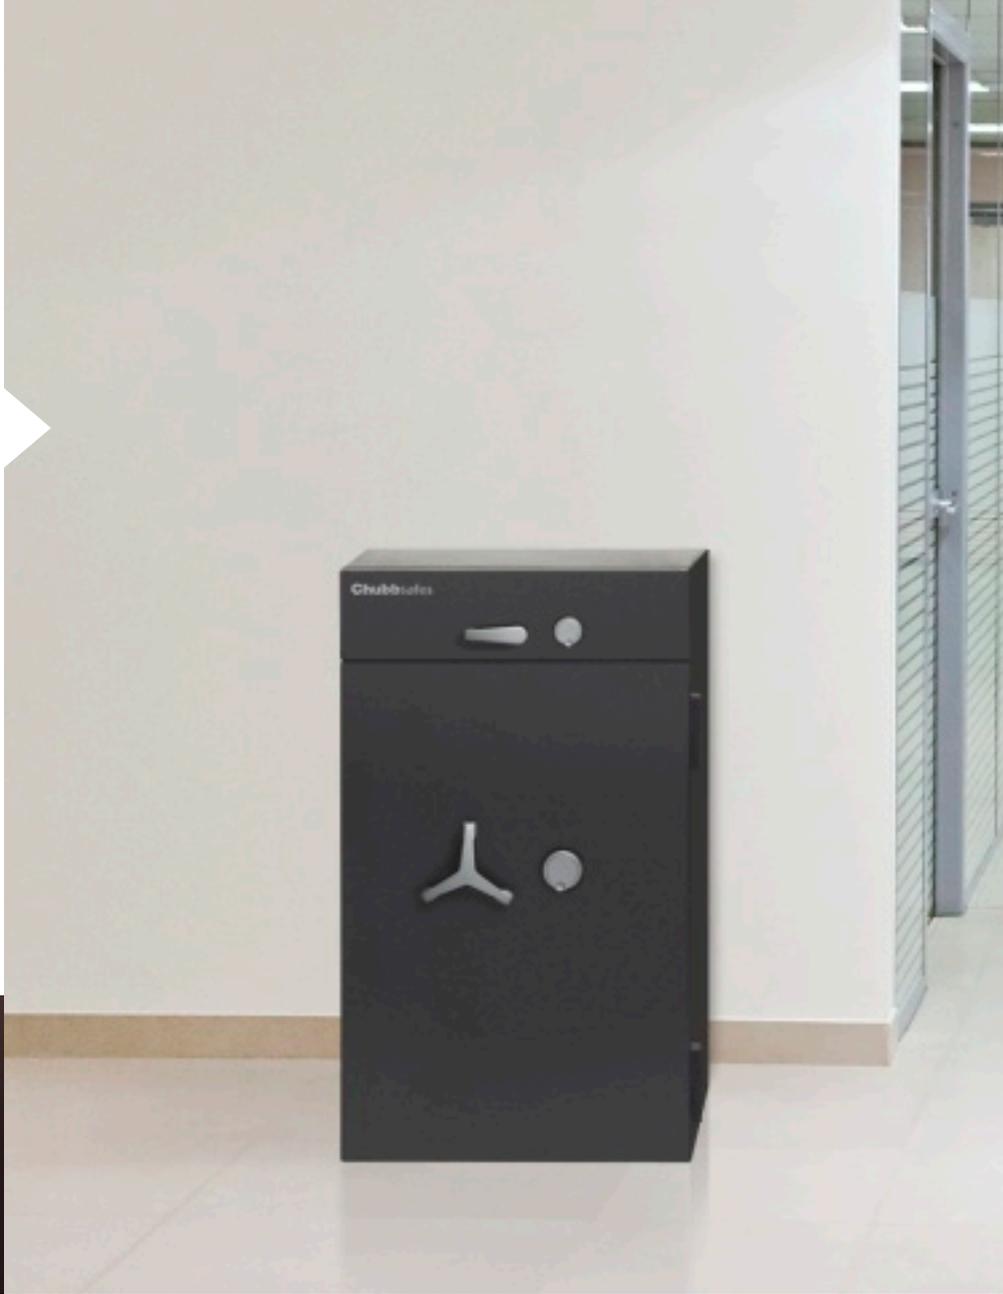

# PROGUARD DT

## BURGLARY-RESISTANT PROTECTION



### KEY FEATURES

- Certified, tested and approved in accordance with the European EN 1143-2 standard, in Grades DI and DII.
- EN 1143-2 certified meaning that insurance ratings are not affected by the additional deposit function.
- Built using the same technology as the ProGuard, which is certified in accordance with the European EN 1143-1 standard for Grade II.
- Constructed using a new composite material designed for strength and reduction in total weight, keeping transportation and installation costs to a minimum.
- Solid steel three-way boltwork.
- Anti-fishing device to prevent anyone reaching the contents through the drawer.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to resist burglary attempts.
- A Class A mechanical key lock or a Class B electronic lock, approved in accordance with EN 1300, available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access.
- Drawer trap fitted with a Class A key lock.
- Modern design with an ergonomic soft-touch handle.

# PROGUARD DT

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width (mm)	External depth (mm)	Internal height (mm)	Internal width (mm)	Internal depth (mm)	Weight (kg) Gr I	Weight (kg) Gr II	Volume* (litres)
60	687	500	521	314	400	360	144	329	45
110	847	600	561	474	500	386	203	464	91
150	1052	600	561	659	500	386	242	554	127
200	1307	600	561	934	500	386	290	665	180

\* Useable volume below deposit and anti-fishing device.

### Drawers internal dimensions (mm)

Height	Width model 60	Width model 110–200	Depth
90	350	450	230

## LOCK OPTIONS



The drawer trap is locked with a Class A key lock. The safe can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

The primary lock on the safe can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

ProGuard DT's high-security electronic lock – certified Class B by ECB•S – includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between the lock being operated and the door being opened. Also equipped with time-delay override.
- Protective function to raise silent alarm if the lock is opened under duress.

## BURGLARY TESTING



ProGuard DT has been EN 1143-2 certified in Grades DI and DII by ECB•S<sup>1</sup>. This fully graded burglary protection means that insurance ratings for the safe are not affected by the drawer trap function.

A range of attack tools were used to test ProGuard DT's level of resistance, from basic tools to sophisticated thermal and electrical equipment.

1. European Certification Board•Security Systems

Authorised dealer

[www.chubbsafes.com](http://www.chubbsafes.com)